

Homogenizer HLI55

- Max. 14.500 Liter per hour
- Homogenizing pressure up to 700 bar
- Absorbed motor power: max. 55 kW
- Optional in aseptic execution
- Poppet valves for low viscous and slight abrasive products
- Ball valve for high viscous and abrasive products
- Integrated lubrication system
- Best ecological footprint



*Weight incl. motor: max. 2.600 kg
Technical changes reserved*



Poppet valves

Poppet valves for low viscous and slight abrasive products

Model	Max. Pressure	Max. Capacity
HLI55	(bar / psi)	(l/h / gpm)
-100T	100 / 1,450	14,500 / 64
-150T	150 / 2,175	10,000 / 44
-200T	200 / 2,900	7,600 / 33
-250T	250 / 3,600	6,000 / 26
-300T	300 / 4,350	5,000 / 22
-350T	350 / 5,075	4,300 / 19
-550T	550 / 7,975	2,700 / 12

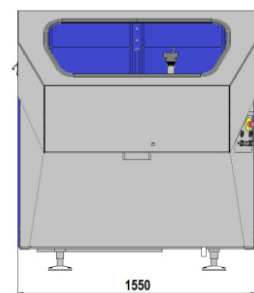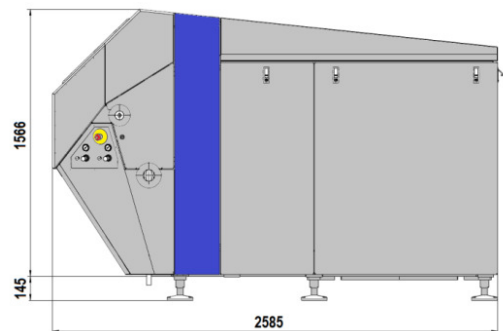

Ball valves

For abrasive and high viscous products

Model	Max. Pressure	Max. Capacity
HLI55	(bar / psi)	(l/h / gpm)
-150K	150 / 2,175	10,000 / 44
-200K	200 / 2,900	7,600 / 33
-250K	250 / 3,600	6,000 / 26
-350K	350 / 4,350	4,300 / 19
-550K	550 / 5,075	2,700 / 12
-700K	700 / 10,000	2,100 / 9

